

DN 75X300 Rainwater Outlet (Wincob)

CASTCO**佳力高試驗中心有限公司
CASTCO TESTING CENTRE LTD.**

香港粉嶺安居街33號
香港粉嶺安全街29A號
E-mail: castco@netvigator.com

33, On Kui Street, Fanling, Hong Kong.
29A, On Chuen Street, Fanling, Hong Kong.
Website: www.castco.com.hk

Tel : 2677 2138
Fax: 2677 0351



Test Certificate Dimension check on discharge and ventilating pipes and fittings, sand-cast or spun in cast iron (Based on BS416 : Part 1 : 1990, Clause 4)

Date of issue : 02 February 2013

Page 1 of 1 page

Castco LRN : DP0130125-128 DIM

Details as supplied by client

Client : Cheung Hing Foundry (HK) Limited

Client's ref. no. : --

Contract no. : -- Job title : --

Sample description : DN 75 x 300mm H Wincob - Rainwater Outlet with (SS316 or C.I.) Dome / Flat Grating

Manufacturer : Cheung Hing Foundry (HK) Limited

Brand : CHF

Remark : Sample Submitted by : Asia Development (HK) Limited

Laboratory test result


Date sample received : 25 January 2013

Date of test : 31 January 2013

Dimensions Check

Specimen no. : DP0130125-128

Dimensions	BS requirement	Product requirement from code no. --	Measured mean value
DN	≥75 mm	75 mm	77 mm
D1	--	180 mm	181 mm
D2	--	180 mm	180 mm
D3	--	182 mm	185 mm
D4	--	220 mm	220 mm
D5	--	265 mm	268 mm
H	--	300 mm	300 mm
H1	--	80 mm	80 mm
H2	--	9 mm	9.06 mm
H3	--	60 mm	63 mm
H4	--	40 mm	40 mm

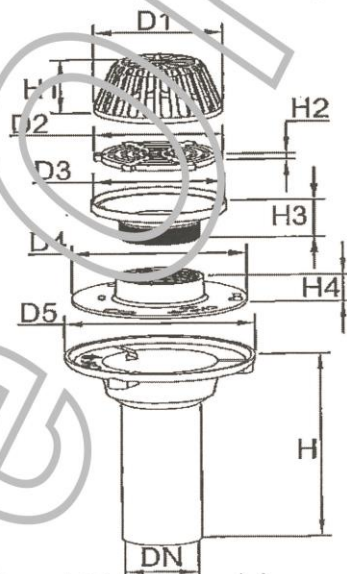

- Remarks :
1. Test result relates only to the specimen tested.
 2. Compliance of the test results to the specification is an opinion of the laboratory and is not covered under the HOKLAS accreditation.
 3. Test results of the sample comply with the requirement of BS416 : Part 1 : 1990, Clause 4.

Checked by :

FU HO MAN
Assistant Technical Officer

Approved Signatory :

CHEUNG CHIN KEUNG
BSc, MSc, DIC, MSc(Eng), MHKIE,
RPE (Civil & Geot)

Director

End of Report

Form No. PIPE DIM4.5-T3 dd 01/09/2006

Item no. DP/0501

HKAS has accredited this laboratory (Reg. No. 032 - TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. This report shall not be reproduced unless with prior written approval from this laboratory. This laboratory is accredited in accordance with the recognised International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer joint ISO-ILAC-IAF Communique dated January 2009)

DN 100X300 Rainwater Outlet (Wincob)

CASTCO

佳力高試驗中心有限公司
CASTCO TESTING CENTRE LTD.

香港粉嶺安居街33號
香港粉嶺安全街29A號
E-mail: castco@netvigator.com

33, On Kui Street, Fanling, Hong Kong.
29A, On Chuen Street, Fanling, Hong Kong.
Website: www.castco.com.hk

Tel : 2677 2138
Fax: 2677 0351



Test Certificate
Dimension check on discharge and ventilating pipes
and fittings, sand-cast or spun in cast iron
(Based on BS416 : Part 1 : 1990, Clause 4)

Date of issue : 02 February 2013

Page 1 of 1 page

Castco LRN : DP0130125-129 DIM

Details as supplied by client

Client : Cheung Hing Foundry (HK) Limited

Client's ref. no. : --

Contract no. : -- Job title : --

Sample description : DN 100 x 300mm H Wincob - Rainwater Outlet with (SS316 or C.I.) Dome / Flat Grating

Manufacturer : Cheung Hing Foundry (HK) Limited

Brand : CHF

Remark : Sample Submitted by : Asia Development (HK) Limited

Laboratory test result


Date sample received : 25 January 2013

Date of test : 31 January 2013

Dimensions Check

Specimen no. : DP0130125-129

Dimensions	BS requirement	Product requirement from code no. --	Measured mean value
DN	≥96 mm	100 mm	100 mm
D1	--	180 mm	180 mm
D2	--	180 mm	181 mm
D3	--	182 mm	184 mm
D4	--	220 mm	223 mm
D5	--	265 mm	267 mm
H	--	300 mm	300 mm
H1	--	80 mm	80 mm
H2	--	9 mm	9.06 mm
H3	--	60 mm	63 mm
H4	--	40 mm	40 mm

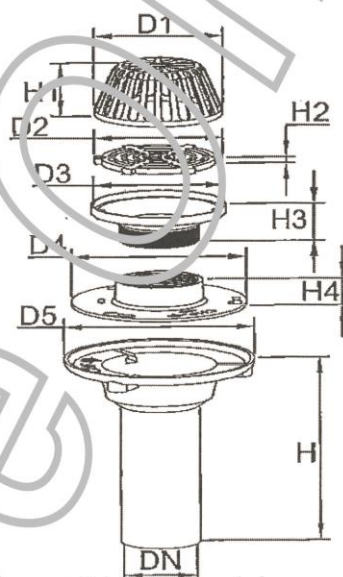

- Remarks :
1. Test result relates only to the specimen tested.
 2. Compliance of the test results to the specification is an opinion of the laboratory and is not covered under the HOKLAS accreditation.
 3. Test results of the sample comply with the requirement of BS416 : Part 1 : 1990, Clause 4.

Checked by :

FU HO MAN
Assistant Technical Officer

Approved Signatory :

End of Report

CHEUNG CHIN KEUNG
BSc, MSc, DIC, MSc(Eng), MHKIE,
RPE (Civil & Geot)

Director

Form No. PIPE DIM41 T3 dd 01/09/2006

Item no. DP/0501

HKAS has accredited this laboratory (Reg. No. 032 - TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. This report shall not be reproduced unless with prior written approval from this laboratory. This laboratory is accredited in accordance with the recognised International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer joint ISO-ILAC-IAF Communique dated January 2009)

DN 150X300 Rainwater Outlet (Wincob)

CASTCO**佳力高試驗中心有限公司
CASTCO TESTING CENTRE LTD.**

香港粉嶺安居街33號
香港粉嶺安全街29A號
E-mail: castco@netvigator.com

33, On Kui Street, Fanling, Hong Kong.
29A, On Chuen Street, Fanling, Hong Kong.
Website: www.castco.com.hk

Tel : 2677 2138
Fax: 2677 0351



Test Certificate Dimension check on discharge and ventilating pipes and fittings, sand-cast or spun in cast iron (Based on BS416 : Part 1 : 1990, Clause 4)

Date of issue : 02 February 2013

Page 1 of 1 page

Castco LRN : DP0130125-130 DIM

Details as supplied by client

Client : Cheung Hing Foundry (HK) Limited

Client's ref. no. : --

Contract no. : -- Job title : --

Sample description : DN 150 x 300mm H Wincob - Rainwater Outlet with (SS316 or C.I.) Dome / Flat Grating

Manufacturer : Cheung Hing Foundry (HK) Limited

Brand : CHF

Remark : Sample Submitted by : Asia Development (HK) Limited

Laboratory test result


Date sample received : 25 January 2013

Date of test : 31 January 2013

Dimensions Check

Specimen no. : DP0130125-130

Dimensions	BS requirement	Product requirement from code no. --	Measured mean value
DN	≥150 mm	150 mm	151 mm
D1	--	225 mm	225 mm
D2	--	225 mm	223 mm
D3	--	227 mm	227 mm
D4	--	270 mm	270 mm
D5	--	320 mm	319 mm
H	--	300 mm	302 mm
H1	--	105 mm	102 mm
H2	--	12 mm	12.11 mm
H3	--	60 mm	60 mm
H4	--	40 mm	40 mm

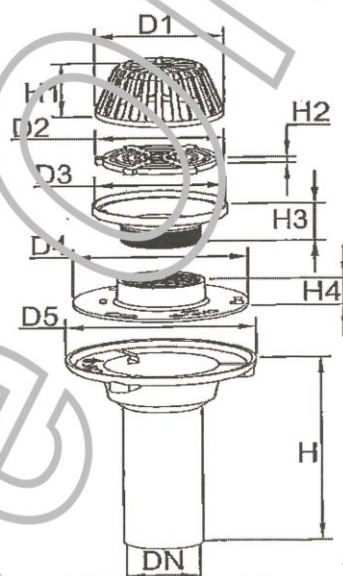

- Remarks :
1. Test result relates only to the specimen tested.
 2. Compliance of the test results to the specification is an opinion of the laboratory and is not covered under the HOKLAS accreditation.
 3. Test results of the sample comply with the requirement of BS416 : Part 1 : 1990, Clause 4.

Checked by

FU HO MAN
Assistant Technical Officer

Approved Signatory :

CHEUNG CHIN KEUNG
BSc, MSc, DIC, MSc(Eng), MHKIE,
RPE (Civil & Geot)

Director

End of Report

Form No. TPE DIM 46 T3 dd 01/09/2006

Item no. DP/0501

HKAS has accredited this laboratory (Reg. No. 032 - TEST) under HOKLAS for specific laboratory activities as listed in the HOKLAS directory of accredited laboratories. This report shall not be reproduced unless with prior written approval from this laboratory. This laboratory is accredited in accordance with the recognised International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer joint ISO-ILAC-IAF Communique dated January 2009)